

# Brass Female Stem Adaptor

Easily converts a Speedfit connection to a FBSP type

## Overview

Speedfit DZR brass push-fit adaptor that converts Speedfit push-fit to a female thread appliance.

The fitting is quicker and easier to install in confined spaces than traditional methods as it eliminates the need for hot works.

Designed, manufactured and assembled in the UK.

## Features & Benefits

- Safe flame-free installation, with no hot works, glue or flux
- Suitable for use with JG Speedfit PEX and polybutylene barrier pipe (inserts required) and copper pipe
- Suitable for hot and cold water and central heating systems



| Product code     | Description               | Size            | Bag QTY |
|------------------|---------------------------|-----------------|---------|
| <b>MW501514N</b> | Brass Female Stem Adaptor | 15mm x 1/2" BSP | 5       |
| <b>MW502216N</b> | Brass Female Stem Adaptor | 22mm x 3/4" BSP | 5       |



50 year guarantee when used with JG Speedfit Layflat PB and PEX Barrier Pipes

# Brass Female Stem Adaptor


## Working parameters & specifications

| Application                              | Usual working temperature °C | Maximum working temperature °C | Maximum working pressure, bar |
|--|------------------------------|--------------------------------|-------------------------------|
| Cold Water (indirect and direct mains)   | 20                           | 20                             | 12                            |
| Central Heating                          | 82                           | 92                             | 3                             |
| Hot Water (including unvented cylinders) | 65                           | 95                             | 6                             |

## Materials

Body Brass, De-Zincification Resistant

## Dimensions – All measurements in mm unless otherwise stated

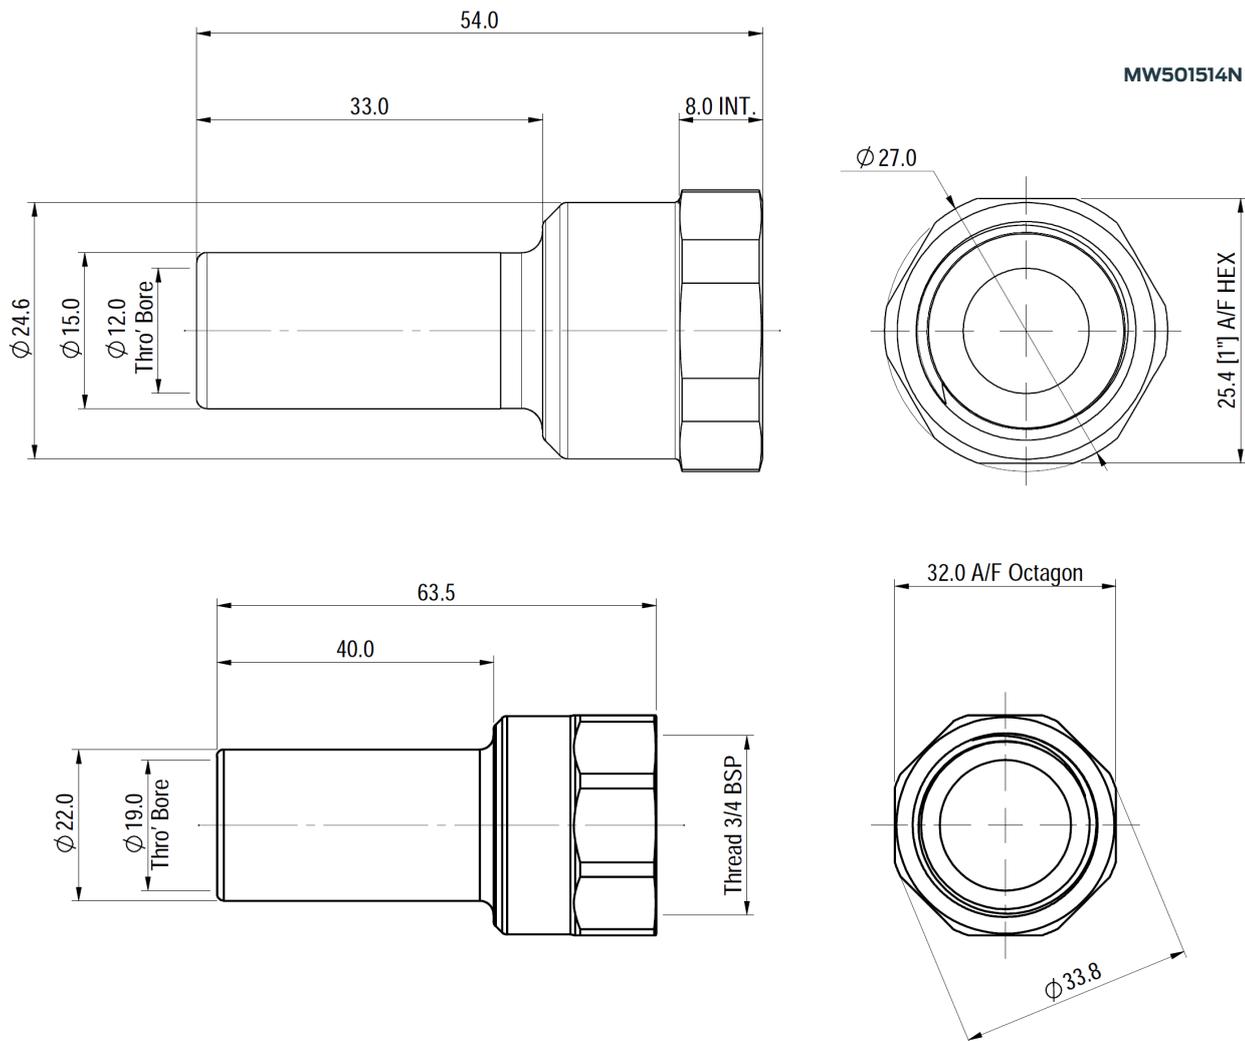

THIS PRODUCT IS MANUFACTURE FROM DE-ZINCIFICATION RESISTANT BRASS

MW502216N