

# JG Speedfit Male Coupler

A durable brass adaptor for connecting Metric to FBSP type fittings

## Overview


Speedfit DZR brass push-fit coupler for connecting metric pipe using a male thread. To connect the push-fit end, simply push onto a plastic or copper pipe. To demount the connection, push the collet towards the body of the fitting and pull the pipe to release.

The fitting is quicker and easier to install in confined spaces than traditional methods as it eliminates the need for hot works.

Designed, manufactured and assembled in the UK.

## Features & Benefits

- Instant push-fit connection and durable male thread
- Safe flame-free installation, with no hot works, glue or flux
- Compatible with plastic or copper pipes (inserts required)
- Suitable for hot and cold water and central heating systems

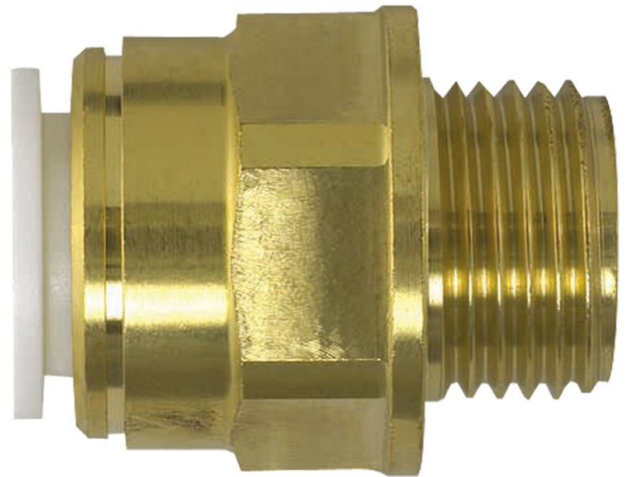

Product code	Description	Size	Bag QTY
<b>MW011504N</b>	Male Coupler	15mm x 1/2" BSPT	5
<b>MW012206N</b>	Male Coupler	22mm x 3/4" BSPT	5
<b>MW012808N</b>	Male Coupler	28mm x 1" BSPT	5

Product code	Description	Size	Bag QTY
<b>10MC(1/2)</b>	Male Coupler	10mm x 1/2" BSP	5
<b>15MC(1/2)</b>	Male Coupler	15mm x 1/2" BSP	5
<b>22MC(3/4)</b>	Male Coupler	22mm x 3/4" BSP	5
<b>MW012818N</b>	Male Coupler	28mm x 1" BSP	5



50 year guarantee when used with JG Speedfit Layflat PB and PEX Barrier Pipes

# JG Speedfit Male Coupler


## Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	12
Central Heating	82	105, short term malfunction at 114	3
Hot Water (including unvented cylinders)	65	95	6

## Materials

Body	X-Linked Polyethylene, White
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Glass Filled Nylon
Collet Teeth	Stainless Steel 301
Caps	Nylon 66 (40% Mineral Filled), White

## Dimensions – All measurements in mm unless otherwise stated

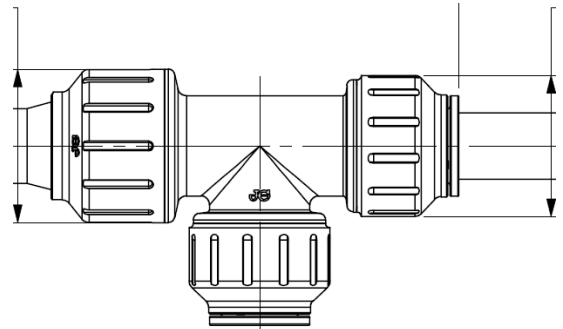

### PLASCE HOLDER - SOURCING FROM THEREFORE

Product code	A	B	C	D	Za	Zb	Zc	B
15TB	15mm x 1/2"	46	47.5	85	30	18	15	15