

# Bulkhead Elbow

**For safe and secure through wall pipe connections**

## Overview


Speedfit plastic push-fit fitting that is primarily used for the modular bathroom 'Pod' market. The bulkhead allows connections to fixtures, through partitions. Simply push the fitting fully onto plastic or copper pipe. To demount the connection, push the collet towards the body of the fitting and pull the pipe to release.

The fitting is quicker and easier to install in confined spaces than traditional methods as it eliminates the need for hot works or tools.

Designed, manufactured and assembled in the UK.

## Features & Benefits

- Instant push-fit connection
- Install and demount in seconds without tools
- Safe flame-free installation, with no hot works, glue or flux
- Grip & Seal collet with stainless steel teeth and main O-Ring seal
- Non-toxic, resists corrosion and no scale build-up
- Suitable for use with JG Speedfit PEX and polybutylene barrier pipe (inserts required) and copper pipe
- Suitable for cold and hot water use only

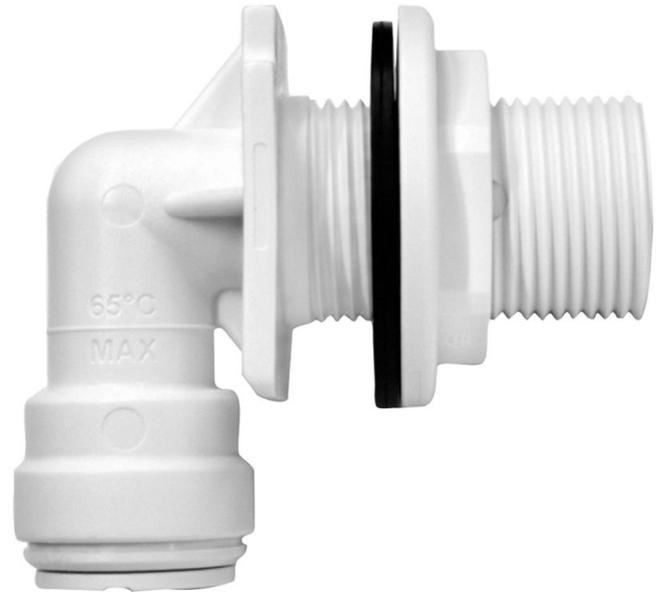

Product code	Description	Size	Bag QTY
CM551516W	Bulkhead Elbow	15mm x 3/4"	5

# JG Speedfit Bulkhead Elbow

## Working parameters & specifications

Application	Usual working temperature °C	Maximum working temperature °C	Maximum working pressure, bar
Cold Water (indirect and direct mains)	20	20	12
Hot Water (including unvented cylinders)	65	65	6

## Materials

Body	Acetal Copolymer (Unfilled), White
O-Ring	Ethylene Polypropylene Diene Monomer (EPDM)
Collet	Acetal Copolymer (Unfilled), White
Collet Teeth	Stainless Steel 301
Caps	Acetal Copolymer (Unfilled), White

## Dimensions – All measurements in mm unless otherwise stated

