


Eco Rescue Plus Pump -EMS MPI 100/0

Technical Features:

- Specifically designed as a compact unit without a pressure tank.
- Stainless steel construction prevents corrosion, ideal for intermittent use.
- Self-priming feature allows easy startup and supports long suction lines.
- Maintenance-free with a long service life.
- Single-phase model with a cable and plug, ready for connection to a standard grounded socket.

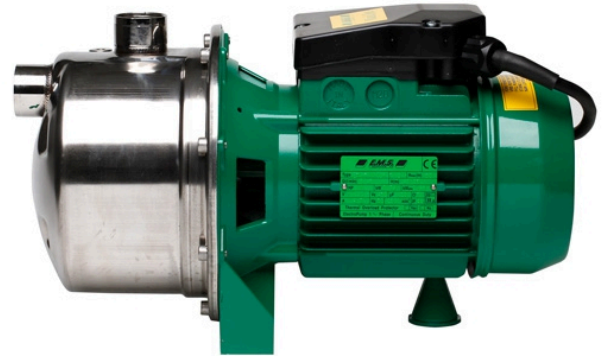

Stainless steel self-priming centrifugal pump:

- Pump Type: Self-priming centrifugal pump
- Maximum Head: 50 meters
- Maximum Flow Rate: 50 liters per minute
- Maximum Water Temperature: +50°C
- Maximum Working Pressure: 8 Bar
- Maximum Suction Height: 9 meters
- Operation: Continuous
- Connection Size: 1"
- Insulation Class: F
- Protection Rating: IP54
- Power Supply: 230V, 4.8A, 1050W

NB! Pump is shown without the pressure switch/valve on top. See bottom picture where this pump is installed in the Eco Rescue Plus water purification system.



Materials:

- Pump Housing: Stainless Steel
- Motor Cover: Aluminum
- Shaft: Stainless Steel
- Impeller: Noryl
- Diffuser: Noryl
- Shaft Seal: Carbon/Ceramic
- O-rings: Rubber

Dimensions & Weight:

- Height: 210 mm
- Length: 410 mm
- Width: 180 mm
- Weight: 12 kg



E-mail
post@ecowater.no



Phone
+47 454 26 200



Verpetveien 56
1543 Vestby, Norway

Organisation no.
860372452